



# GV Lush

## USES


- ▶ General Landscape
- ▶ Lawns
- ▶ Playgrounds
- ▶ Pet Areas
- ▶ Sports
- ▶ Roof Decks
- ▶ Medians



15 Year Manufacturer's Warranty  
8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

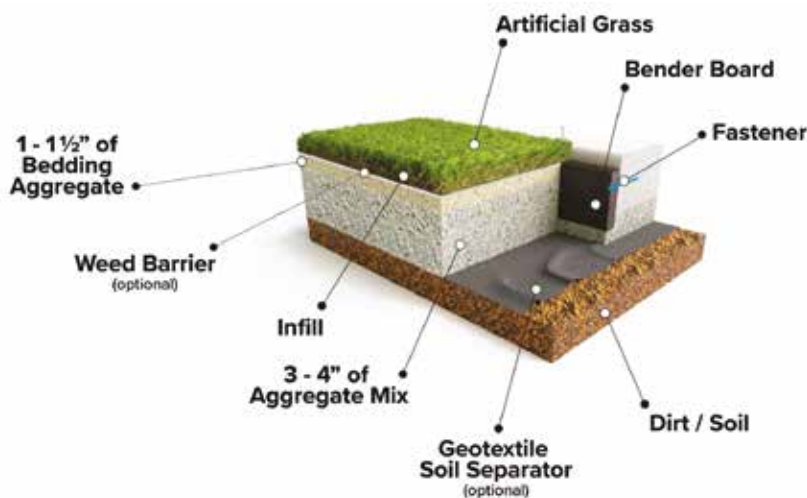

## SPECIFICATIONS

Pile Height: 2"
Turf Gauge: 3/8"
Face Weight: 80 oz./yd <sup>2</sup>
Backing Weight: 26 oz./yd <sup>2</sup>
Total Weight: 106 oz./yd <sup>2</sup>
Stitch Rate: 13/10 cm
Stitches/m <sup>2</sup> : 13,650
Material/Dtex: PE & PP 14,400
Color: Field, Apple, Emerald and Tan Face with Green and Tan Thatch
Type Of Fiber: PE Monofilament and PP Curled As Thatch
Infill Amount: 3.0 lb./psf.
Primary Backing: Premium AST BAcKING
Tuft Bind: 15.3 lbs/force (ASTM D1335)
Permeability: 122.3 inches/hr. (ASTM F1551)
Melting Point: 150°F (ASTM D2859)
Grab Tear MD: 229.0 lbs/force (ASTM D5034)
Grab Tear CMD: 285.7 lbs/force (ASTM D5034)
Roll Width: 15 ft
Roll Length: 100 ft
Sq. Ft. Per Roll: 1,500
Total Roll Weight: 1070 lbs

